MILANI HOB MIXER SET

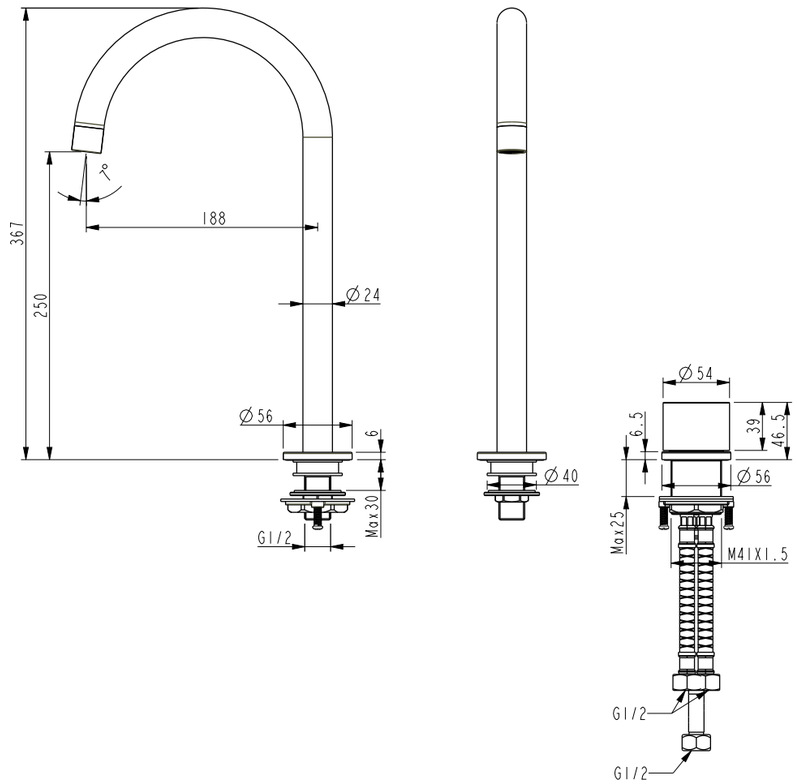

WaterMark
AS/NZS 3718:2005
WM-022852

SPECIFICATIONS

RECOMMENDED USE	Domestic
COLOUR AVAILIBILITY	
PRESSURE RATING	Maximum continuous operating pressure 1000kPa.W. For best performance and longer life we recommend 150-500kPa. Hot and cold water inlet pressure should be equal.
TEMPERATURE RATING	Maximum continuous working temperature 75°C
SUITABLE HOT WATER UNITS	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Not suitable
WATER EFFICIENCY	WELS Star Rating(5Star) – Nominal Flow Rate(5 L/M) Registration No.(T32687)
WARRANTY	Structure: 25 years | Finish: 5 years | Cartridge: 10 years

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors. All ABI Products are designed in Australia. Copyright ABI Interiors 2019. WWW.ABIINTERIORS.COM.AU

MILANI BASIN HOB MIXER SET
INSTALLATION MANUAL

WHAT YOU WILL NEED:

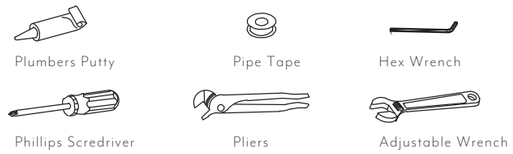

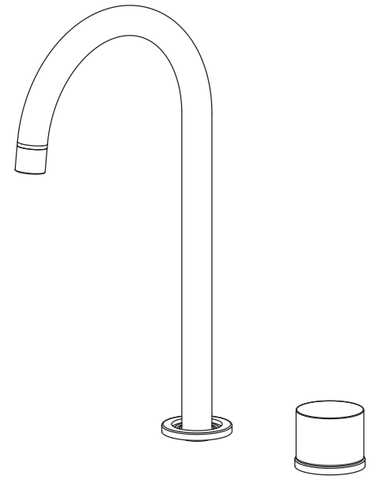

Installation should comply with relevant local authority requirements.
- Maximum hot water temperature 75°C.
- Recommended minimum working pressure 150kpa.
- Recommended maximum working pressure 500kpa.

1 Drill out the holes at 35mm for the spout and 45mm for the mixer.



2 Put the nut out of the bolts by philips screwdriver. As shown in the figure, connect the flexible hoses. (Be sure to distinguish red & blue mark).



3 Put the flexible hose through the plastic washer. Then through the hole in the benchtop. Place the plastic and metal washer underneath the benchtop and fix the screws into the nut



4 Put the body through the base plate and O-ring before putting through the benchtop. Place the plastic and metal washer underneath the desk and fix the screws into the nut

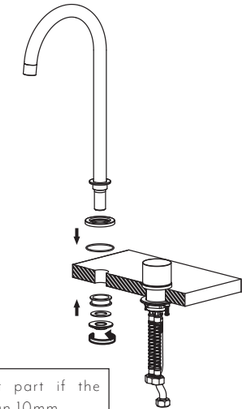

No need to add this copper part if the thickness of the desk is more than 10mm.

5 Attach the two flexible hose to water supply. Take the aerator out of the spout and flush the faucet. Install the aerator back into the faucet after flushing.

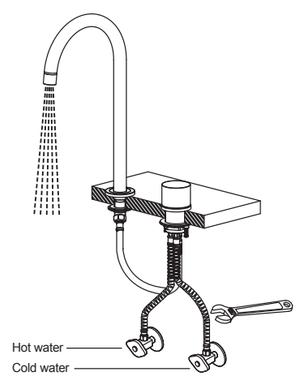

6 Mixer Operation

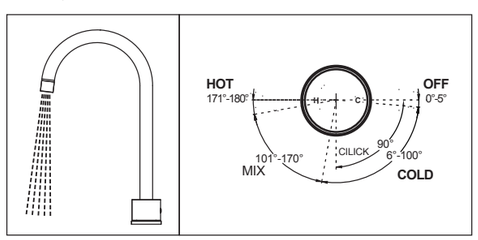

Regularly clean with mild liquid detergent or soap and water

DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material