





VERA DOUBLE SINK

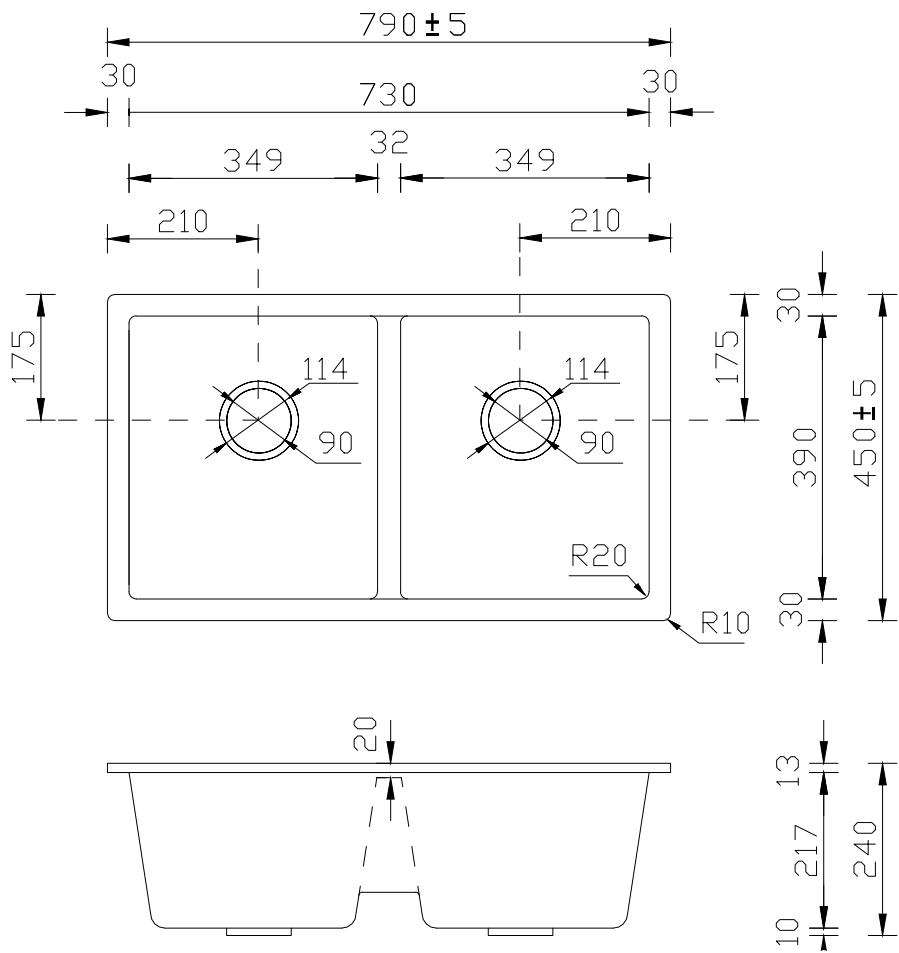


SPECIFICATIONS

RECOMMENDED USE	Domestic, Commercial
COLOUR AVAILABILITY	
MATERIAL	Composite Black Granite
COMPOSITION	80% Granite Quartz/ 20% Acrylic Resin
INSTALLATION	Undermount, Top Mount
OVERFLOW	Yes
WARRANTY	Structure: 25 years
LITRE	48 Litres

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors. All ABI Products are designed in Australia. Copyright ABI Interiors 2019. WWW.ABIINTERIORS.COM.AU

CUT-OUT TEMPLATES

TOPMOUNT INSTALLATION

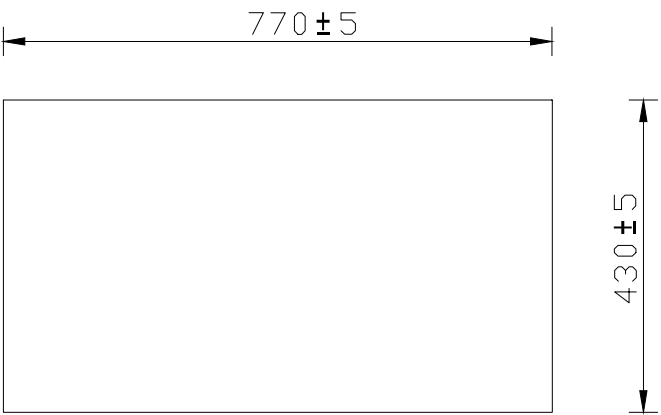

UNDERMOUNT INSTALLATION



NOTE: PRODUCT DOES NOT INCLUDE BASKET WASTE


# INSTALLATION GUIDE - UNDERMOUNT SINK

Note: This product must be installed by a licensed tradesperson.  
This is a general installation guide - there are many factors that are involved that can alter the installation method.




- 1 Mark out desired location of sink using the cut out template dimensions provided.

Cut out sink hole using preferred method.

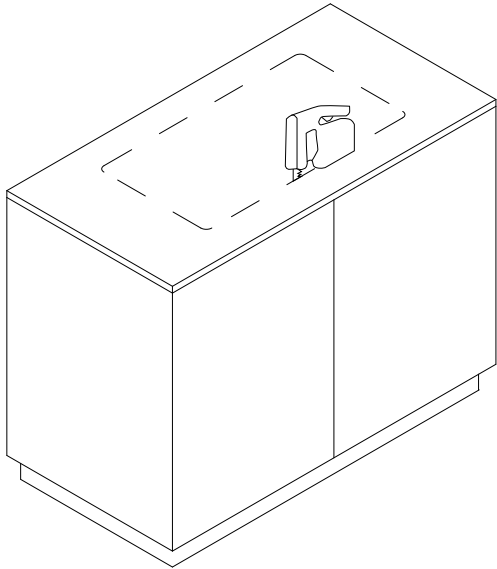

- 2 Clean around the edge of benchtop sink hole & perimeter of sink rim.


Position the sink in the cabinet below the benchtop hole.  
Apply adhesive sealant to the perimeter of sink rim & lift into position.

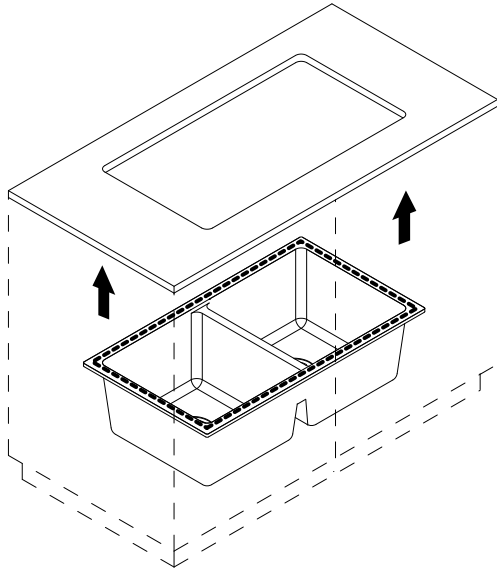

- 3 Lay a piece of timber across the benchtop hole & position in line with sink holes below.

Place clamps through the sink holes & tighten the clamps to hold the sink in place. Wipe away any excess adhesive sealant around benchtop opening.


Note: Use rags to protect surfaces when either the clamp or timber is making contact with the benchtop or sink.

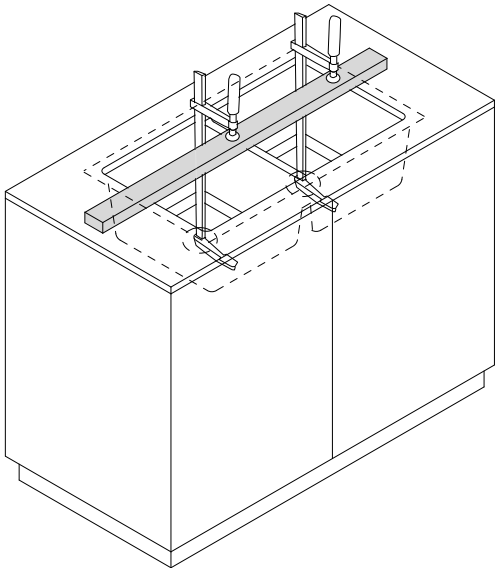

- 4 Using the benchtop material build rebated mounting tabs.

Clean around the underside perimeter of the sink & the mounting tabs.

Apply adhesive sealant to the mounting tab & fix it to the underside of the benchtop & sink rim. Repeat tabs at regular intervals. Wipe away any excess adhesive around mounting tabs.

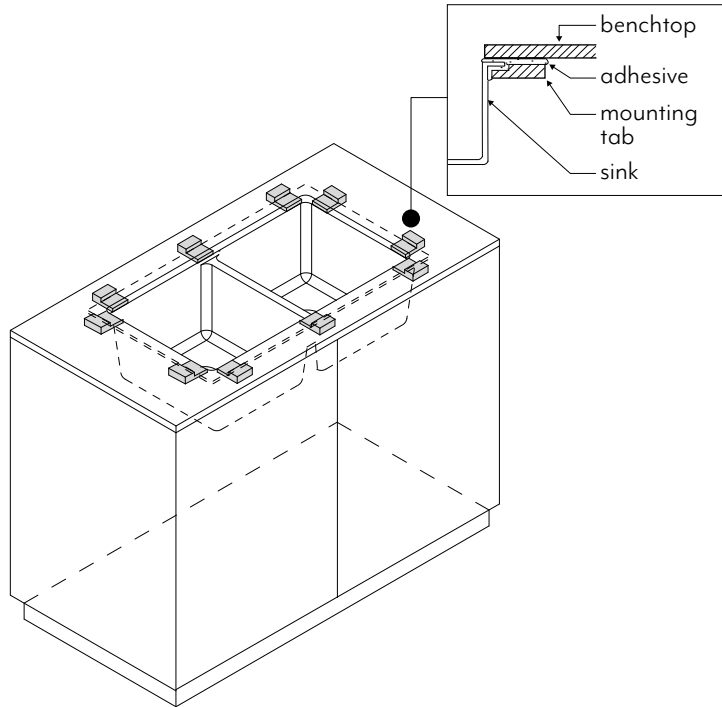


# INSTALLATION GUIDE - TOP MOUNT SINK

Note: This product must be installed by a licensed tradesperson.  
This is a general installation guide - there are many factors that are involved that can alter the installation method.




- 1 Mark out desired location of sink using the cut out template dimensions provided.

Cut out sink hole using preferred method.

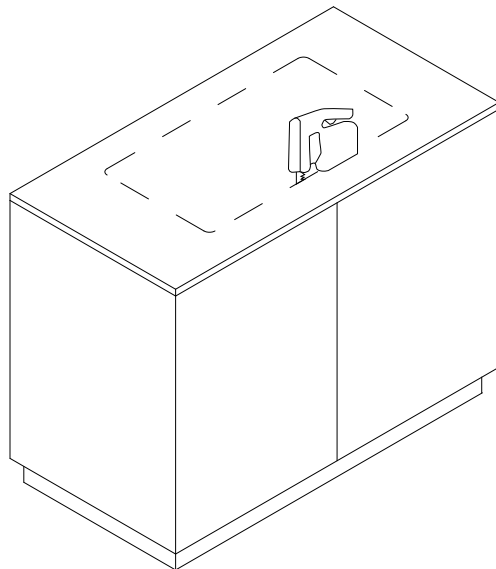

- 2 Clean around edge of benchtop sink hole & perimeter of sink rim.

Apply adhesive sealant to the underside perimeter of sink rim & lower into position.

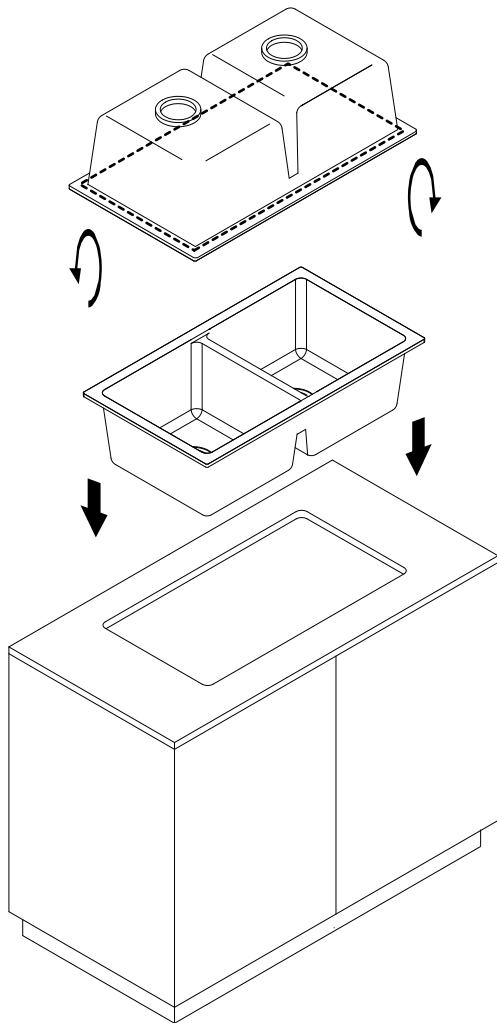

- 3 Wipe away any excess adhesive sealant around sink rim.

