



OTTO HEATED TOWEL RAIL

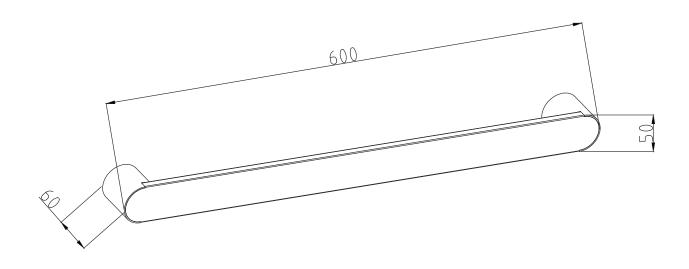

SPECIFICATIONS	
RECOMMENDED USE	Domestic
COLOUR AVAILIBILITY	
MATERIAL	Stainless Steel
VOLTAGE	12V
SURFACE TEMPERATURE	40-50 °C
INSTALLATION	Qualified Electrician is to supply suitable 12V driver with minimum 35W capacity Recommended to install 2 or more to heat whole towel. Must be mounted on the right side.
WARRANTY	Structure: 10 years Finish: 5 years Electrical: 2 years


OTTO HEATED TOWEL RAIL INSTALLATION MANUAL



YOU WILL NEED:



PRODUCT COMPONENTS:

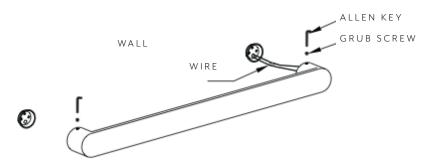


INSTRUCTIONS

- Hold the towel rail against the 1. wall, making the product and
 - level the same as figure shown.



Place the fixing bracket on the circle that 3. was marked in step 2. Use the pencil to draw a small circle as shown below. The power cord is to be fixed on the right side.




Mark this position on the wall

like shown.





2.














Connect the electric cord inside the wall with the cord of the towel rail, put on the waterproof liner, hide the cable inside the product.



Use the allen key to fix the towel rail on the bracket, then the installation is finished.





SAFTEY PRECAUTIONS:

- 1. This product is only used for drying washable textiles, not suitable for drying silk or synthetic fabrics.
- 2. This product is not suitable by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge. Unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- 3. The product must be connected to a power supply that the rated voltage conforms with the label shown on the product.
- 4. Do not use the product when the product is damaged.
- 5. The product must not be powered on until maintenance or cleaning is completed.
- 6. Any change of or repair to the damaged internal wires must be done by a qualified electrician who is deemed qualified by the industry standard to avoid a hazard. When any external fittings are required the power must be cut off completely.
- 7. Do not immerse the appliance in any liquid.
- 8. In order to prevent children being hurt by the appliance, the minumum distance of the appliance to the ground when working should not be less than 600mm.
- 9. Do not install near shower or bathtub or the equivelant.

THIS PRODUCT IS TO BE USED ONLY AS A HEATED TOWEL RAIL. TO AVOID DAMAGING THE PRODUCT PLEASE DO NOT PUT PRESSURE ON IT (EG. HANGING OR LEANING ON PRODUCT)

PLEASE NOTE: The surface temperature will increase as the heated towel rail operates. PLEASE BE CAREFUL!